

■System requirements

Product configuration



JFX200-2513 EX

USB2.0 Ethernet
Connection

< Provided as standard >
Sophisticated and user-friendly RIP software
Raster Link 6 PLUS

PC for RIP



Recommended specifications for PC for RIP
OS: Windows 10* Pro 64bit
CPU: Intel® Core™ i5-4670K (3.4GHz)
Chip set: Intel® Z87 Express
Memory: 8GB
HDD: 500GB
Interface: Ethernet port USB1.1/2/0

■Specifications

| Item | JFX200-2513 EX |
|---------------------------------------|---|
| Head | On-demand Piezo head (Array of 3 staggered print heads) |
| Print resolution | 300dpi, 450dpi, 600dpi, 900dpi, 1,200dpi |
| Ink | Type/Color*(3)(4)(5) |
| | Rigid UV curable ink LH-100 |
| | Stretchable UV curable ink LUS-120/LUS-150/LUS-350 |
| Capacity*(1) | 1L bottle / 250 ml bottle |
| Ink circulation system*(2) | White ink circulation by MCT (Mimaki Circulation Technology) |
| Maximum printable area (W x D) | 2,500 x 1,300 mm (98.4x 51.2") |
| Media | Size (W x D) |
| | 2,500 x 1,300 mm (98.4x 51.2") |
| | Height |
| 50 mm (2.0 ") or lower | |
| Weight | 50kg/sqm (110.2 lb/sq. ft2) or less (non concentrated load) |
| Media Suction | Vacuum Suction + Foot Switch |
| Suction Areas | 2 partition (X direction) |
| UV method | LED-UV |
| Interface | USB, Ethernet |
| Applicable standards | VCCI class A, CE mark, CB report, U.S. safety standard UL (UL62368-1), RoHS Directive, FCC Class A, Machinery directive, EAC, RCM |
| Power | Single-phase AC200 to 240V, 12A or lower |
| Power consumption | 2.88 kVA or less |
| Operating environment | Temperature |
| | 15-30 degC (59 - 86 degF) |
| | Humidity |
| | 35 - 65%Rh |
| | Optimal Temperature |
| 20 - 25 degC (68 - 77 degF) | |
| Temperature Gradient | Less than ± 10 degC/h (± 18F/h) |
| Dust | Equivalent to an Office |
| Installatoin Dimensions (W x D x H) | 4,440 x 2,250 x 1,250mm (173.2x 88.5 x 49.2") |
| Assembled Dimensions (W x D x H) | 4,440 x 2,450 x 1,250mm (173.2 x 96.4 x 49.2") |
| Weight | 650kg (1,433 lb) |

■Optional Accessories

| Item | Item No. | Remarks |
|--|-----------|--|
| Ionizer kit | OPT-J0342 | Static eliminator kit |
| Vacuum unit (φ 3mm × 200mm) (φ 0.1 in. × 7.9 in.) | OPT-J0216 | Three-phase, 200 V-240 V, 30 A, 3.4kW |
| Vacuum unit (φ 1mm × 200mm) (φ 0.04 in. × 7.9 in.) | OPT-J0217 | Single-phase, 200 V-240 V, 30 A, 1.9kW |
| Vacuum unit (φ 3mm × 400mm) (φ 0.1 in. × 15.7 in.) | OPT-J0232 | Three-phase, 380 V-480 V, 20 A, 3.4kW |
| Optional blower Connector Kit | OPT-J0348 | Necessary kit for connecting an optional vacuum unit |
| 4C+4White ink applying kit | OPT-J0499 | Necessary kit for 4C+4White ink set |
| Lift-Up Block | OPT-J0513 | |

*The optional accessories available with JFX200-2513 are also compatible with JFX200-2513 EX.
*OPT-J0393 PR-100/PR-200KIT is not necessary to use JFX200-2513 EX.
However when starting to use PR-200, it is necessary to replace to the pump of the initial attachment.

⚠ Inks and substrates:

- As physical properties of ink (adhesion, weather resistance etc.) are different depending on media, please be sure to have a print test in advance.
- Depending on the application, primers, other surface treatment or surface protection such as lamination may be necessary.

●Some of the samples in this catalog are artificial renderings. ●Specifications, design and dimensions stated in this catalog may be subject to change without notice (for technical improvements, etc.). The corporate names and merchandise names written on this catalog are the trademark or registered trademark of the respective corporations. ●Inkjet printers print using extremely fine dots, so colors may vary slightly after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences.

●The specifications described in this catalog are as of November 2022.

Mimaki MIMAKI ENGINEERING CO., LTD.
2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL: +81-268-64-2281


Mimaki Global Network

| | | | |
|-----------|--|-----------|----------------------------------|
| USA | MIMAKI USA, INC. | Europe | MIMAKI EUROPE B.V. |
| Brazil | MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA | Indonesia | PT. MIMAKI INDONESIA |
| India | MIMAKI INDIA PRIVATE LIMITED | Australia | MIMAKI AUSTRALIA PTY. LTD. |
| Taiwan | MIMAKI ENGINEERING (TAIWAN) CO.,LTD. | China | SHANGHAI MIMAKI TRADING CO.,LTD. |
| Singapore | MIMAKI SINGAPORE PTE. LTD. | Thailand | MIMAKI (THAILAND) CO.,LTD. |

Automation of printing processes

■Adaptable to "Mimaki Device Language (MDL)" to realize automation of printing processes

Using MDL commands allows you to automate printer control, job management, and workpiece conveying device operation from an external device

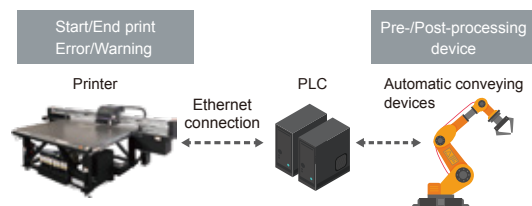

*When using MDL commands, refer to the separate MDL commands manual included in the SDK.
*Please note that machine failures due to MDL commands may not be covered by our warranty.

■Supplies

| Item | Color | Item No. | Remarks |
|----------------|---------------|-------------|---|
| LH-100 | Cyan | LH100-C-BA | Ink package: 1L bottle/250 ml bottle*(1) |
| | Magenta | LH100-M-BA | |
| | Yellow | LH100-Y-BA | |
| | Black | LH100-K-BA | |
| | Light Cyan | LH100-LC-BA | |
| | Light Magenta | LH100-LM-BA | |
| | White | LH100-W-BA | |
| LUS-120 | Clear | LH100-CL-BA | |
| | Cyan | LUS12-C-BA | |
| | Magenta | LUS12-M-BA | |
| | Yellow | LUS12-Y-BA | |
| | Black | LUS12-K-BA | |
| | White | LUS12-W-BA | |
| | Clear | LUS12-CL-BA | |
| LUS-150 | Cyan | LUS15-C-BA | |
| | Magenta | LUS15-M-BA | |
| | Yellow | LUS15-Y-BA | |
| | Black | LUS15-K-BA | |
| | Light Cyan | LUS15-LC-BA | |
| | Light Magenta | LUS15-LM-BA | |
| | White | LUS15-W-BA | |
| LUS-350 (3) | Cyan | LUS35-C-BA | |
| | Magenta | LUS35-M-BA | |
| | Yellow | LUS35-Y-BA | |
| | Black | LUS35-K-BA | |
| | White | LUS35-W-BA | |
| | Clear | LUS35-CL-BA | |
| Primare*(4) | PR-200 | PR200-Z-BA | |

*1: LH-100, LUS-120 and PR-200 come in both 250ml and 1L bottles. *2: MCT works only with white ink.
*3: The LUS-350 will be applied later. *4: The PR-200 is not compatible with LUS-350. *5: The LUS-350 will be applied later.
*Stretchability of flexible ink may vary depending on materials, please have a prior test print.
*LH-100, LUS-120 and LUS-150 are GREENGUARD Gold certification ink.

About Ethernet

*Please use Category 6 (CAT6) network cables. *Cannot be connected through the router.
*When printing from ethernet, place the printer and output PC on the same network.
*When using a switching hub, a 1000BASE-T compatible hub is necessary.
*Although up to 4 printers can be registered with RasterLink6Plus, printing may stop depending on the network environment.

⚠ Safety notice:

This product is equipped with UV irradiation equipment.
Please pay attention to the following notes in order to use safely.
•Do not look directly into the UV light source nor place your hand, or expose your skin directly to the UV light source.
•Depending upon print mode, some VOC emittance from printed parts not yet cured and hardened may occur.
•In addition, please be sure to read and follow the instructions and guidelines of the manual carefully.

For
**INDUSTRIAL
PRODUCTS**

LED-UV Curing Flatbed Inkjet Printer



JFX200-2513 EX


Entry model combining high added-value and high productivity



Feel the texture!



Semi-stereoscopic 2.5D printing increases utility!

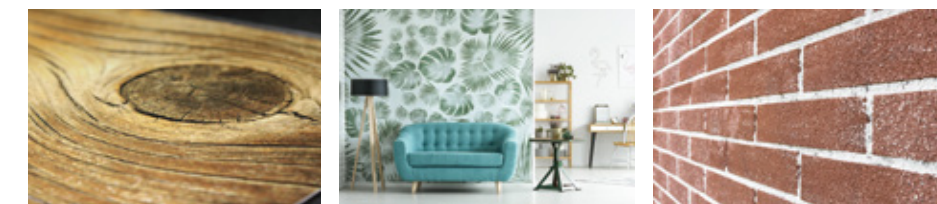

DUPLI DATA
NUMÉRIQUEMENT VOTRE
www.dupli-data.fr



JFX200-2513 EX


The JFX200-2513 EX maximizes the productivity and user-friendliness of the JFX200-2513, the industry's best-selling UV-LED curing flatbed inkjet printer, and enables high value-added printing.

1 Semi-stereoscopic 2.5D printing made easy! High value-added printing with "2.5D Texture Print" in "RasterLink6Plus"!

Stereoscopic appeal with 2.5D printing


A newly developed function, "2.5D Texture Print" in Mimaki's original RIP, "RasterLink6Plus" allows you to easily create multi-layered gradation data.

The "Emboss Print", one of Mimaki's printing solutions, "Surface Imaging" makes a surface look bumpy with multi-layered UV ink printing, which requires a manual preparation of step-wise data for each layer to create smoother expression. However, "JFX200-2513EX" allows you to easily create 2.5D print data of different layer with steps, simply by using "RasterLink6Plus" (Standard accessory) and Illustrator/Photoshop.

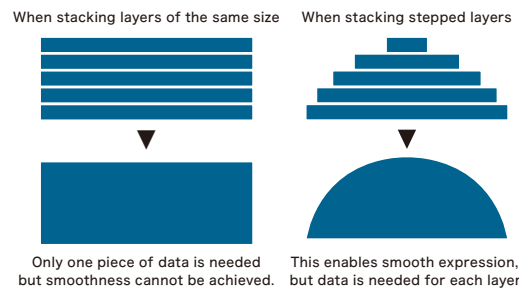

You can create data using Photoshop/Illustrator and **RasterLink6 PLUS**

Simple creation of smooth-stereoscopic 2.5D prints is available with the JFX200-2513 EX to easily show the bumpy surface like woodgrain of interior material, elevated ink of oil-paintings and letters for an impressive look for signage. Not only coloring but also adding smooth print texture can deliver added value.

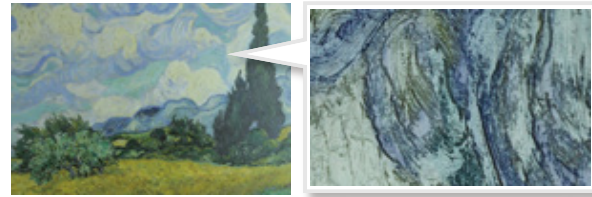

Expression of elevated surface with layered ink




3 Suitable for large format sign graphics, interior/decoration and fine arts, seeking quality

Three image control technologies to realize high quality


1. Waveform control

By discharging spherical ink droplets directly, depositing of droplets and overlapping between dots is reduced, achieving a sharp print quality with low grain.

< Non-spherical discharge >

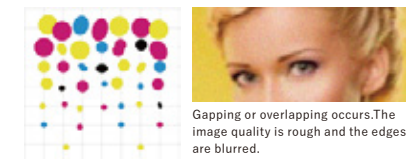


< Discharged in a nearly true spherical state >

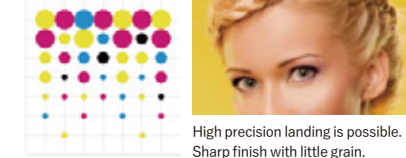


2. Variable dots

Three different ink dot sizes are used in printing to enable high-quality prints with reduced graininess.

< Fixed Dot Image >



< Variable Dot Image >




Dots are combined including the minimum size of 5pl to enable grainless, smooth color printing.


3. MAPS (Mimaki Advanced Pass System)

Banding (horizontal stripes), uneven color, or glossy streak can be reduced to produce smooth prints by printing pass boundaries fading in gradation.

< Without MAPS (Image) >



< With MAPS (Image) >

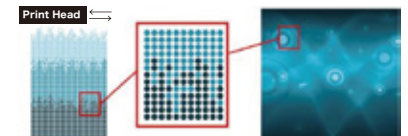


Based on printing conditions such as media/ink type and resolution, the most suitable gradation pattern is automatically selected and printed.

2 Higher-grade productivity and doubled White + Color simultaneous print speed! The printer allows you to respond to demand for short-term delivery.

JFX200-2513 EX prints two times as fast as JFX200-2513 in White + Color simultaneous printing. The newly added Draft mode (300x300HQ 4P Bi Normal) can deliver print speeds up to 35m²/h (376.7 ft²/h) in 4-color + White simultaneous printing.

4-color + White simultaneous printing speed comparison

The print speed will be doubled while printing at the same resolution. Applying the spot color set will alleviate the concern of the disadvantages of low speed.

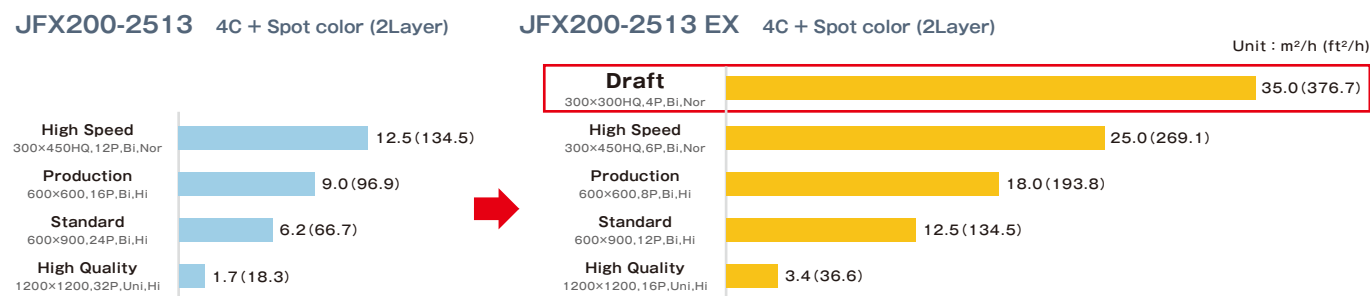

*Time taken for setting materials and the printer's operating time before or after printing are not considered.

You can choose the most suitable ink depending on your material and application.




The color set with Light colors and Clear enables to print high-quality images without graininess.

Supported ink types: LH-100, LUS-150



By adding clear ink, gloss finish can be applied on the print surface, and by printing multiple layers of ink, multi-layered finish for stereoscopic effects can be applied.

Supported ink types: LH-100, LUS-120, LUS-150, LUS-350



By adding primer ink, the adhesion of inks and materials is improved.

Supported ink types: LH-100, LUS-120, LUS-150



As all the nozzles of one head are allocated to the White color, MAPS for White is effective from draft mode, which can create more beautiful white printing.

Supported ink types: LH-100, LUS-150, LUS-120

Please use OPT-J0499(4C+4W) ink applying kit for [4C+4W] printing.

| Type | Hard UV ink | Flexible UV ink | | |
|----------|---|---|---|---|
| Product | LH-100 | LUS-120 | LUS-150 | LUS-350 |
| Features | The LH-100 ink has a high scratch/chemical resistance and an accurate color reproducibility. The ink is suitable for rigid materials. | The LUS-120 ink has 170% stretchability after curing. Its ink film is very flexible and will not crack during post process. | The LUS-150 ink has 150% stretchability after curing and will not crack during post print process. This ink is compatible with a wide range of materials and has a low degree of tackiness. | After curing, the ink can stretch up to 350% when heated to between approx. 120 and 200°C. The ink restores its rigidity after being cooled, maintaining its rounded shape when heated and high durability. |

4 Usability achieved based on Mimaki's long time experience UV flatbed printers

As a pioneer of UV flatbed printers, Mimaki knows everything about ease of use from its long experience. We provide the design that is simple to use and reduces workload, plus a preventive safety function to avoid trouble during printing.


Table size (1,300x2,500mm)

Printing is possible for 4'x8' (1,220mmx2,440mm) panel boards that are commonly used in the marketplace. This table size is ideal for both easy installation and excellent user-friendliness.



Foot switch for vacuum control

Two separate partitions in the X-direction of the vacuum area can be adjusted depending on the media size you use, and newly added foot switch can be used to turn ON/OFF in addition to the control panel.




With Ethernet support

In addition to the conventional USB connection, Ethernet connection is now available. Setup is easy; just add cables to the existing office network environment.



Auto maintenance function to shorten downtime

The NCU is newly mounted!

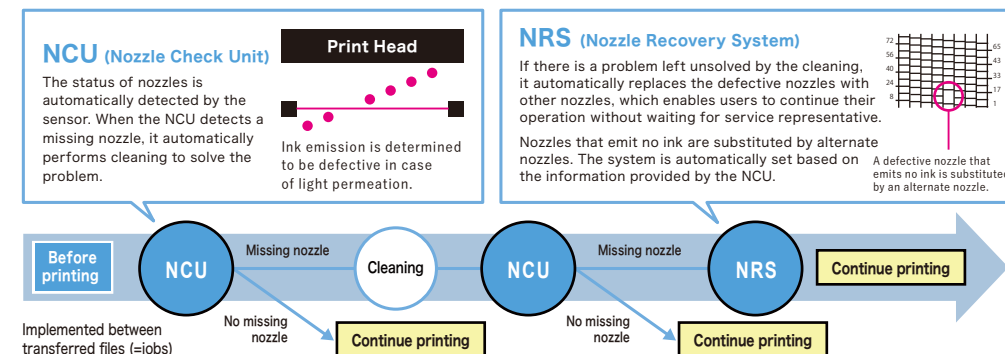

Links with external stop interface allow users to meet safety standards that are different by factory

Other than the standard emergency stop switch, customers can also have the printer work with safety measures that suit their environment. The product can support various safety standards depending on the customer, including safety light curtain and safety mat.



More environment-friendly business model

Mimaki UV inks (LH-100, LUS-120 and LUS-150) obtain certification for GREENGUARD GOLD. The "GREENGUARD Gold certification" ensures that products are acceptable for use even in environments such as schools and medical facilities based on the most strict global standard of chemical substance diffusion. The GREENGUARD Gold-certified inks consider environmental impacts given after printing.

